
Walls that Breathe with Quiet Elegance.

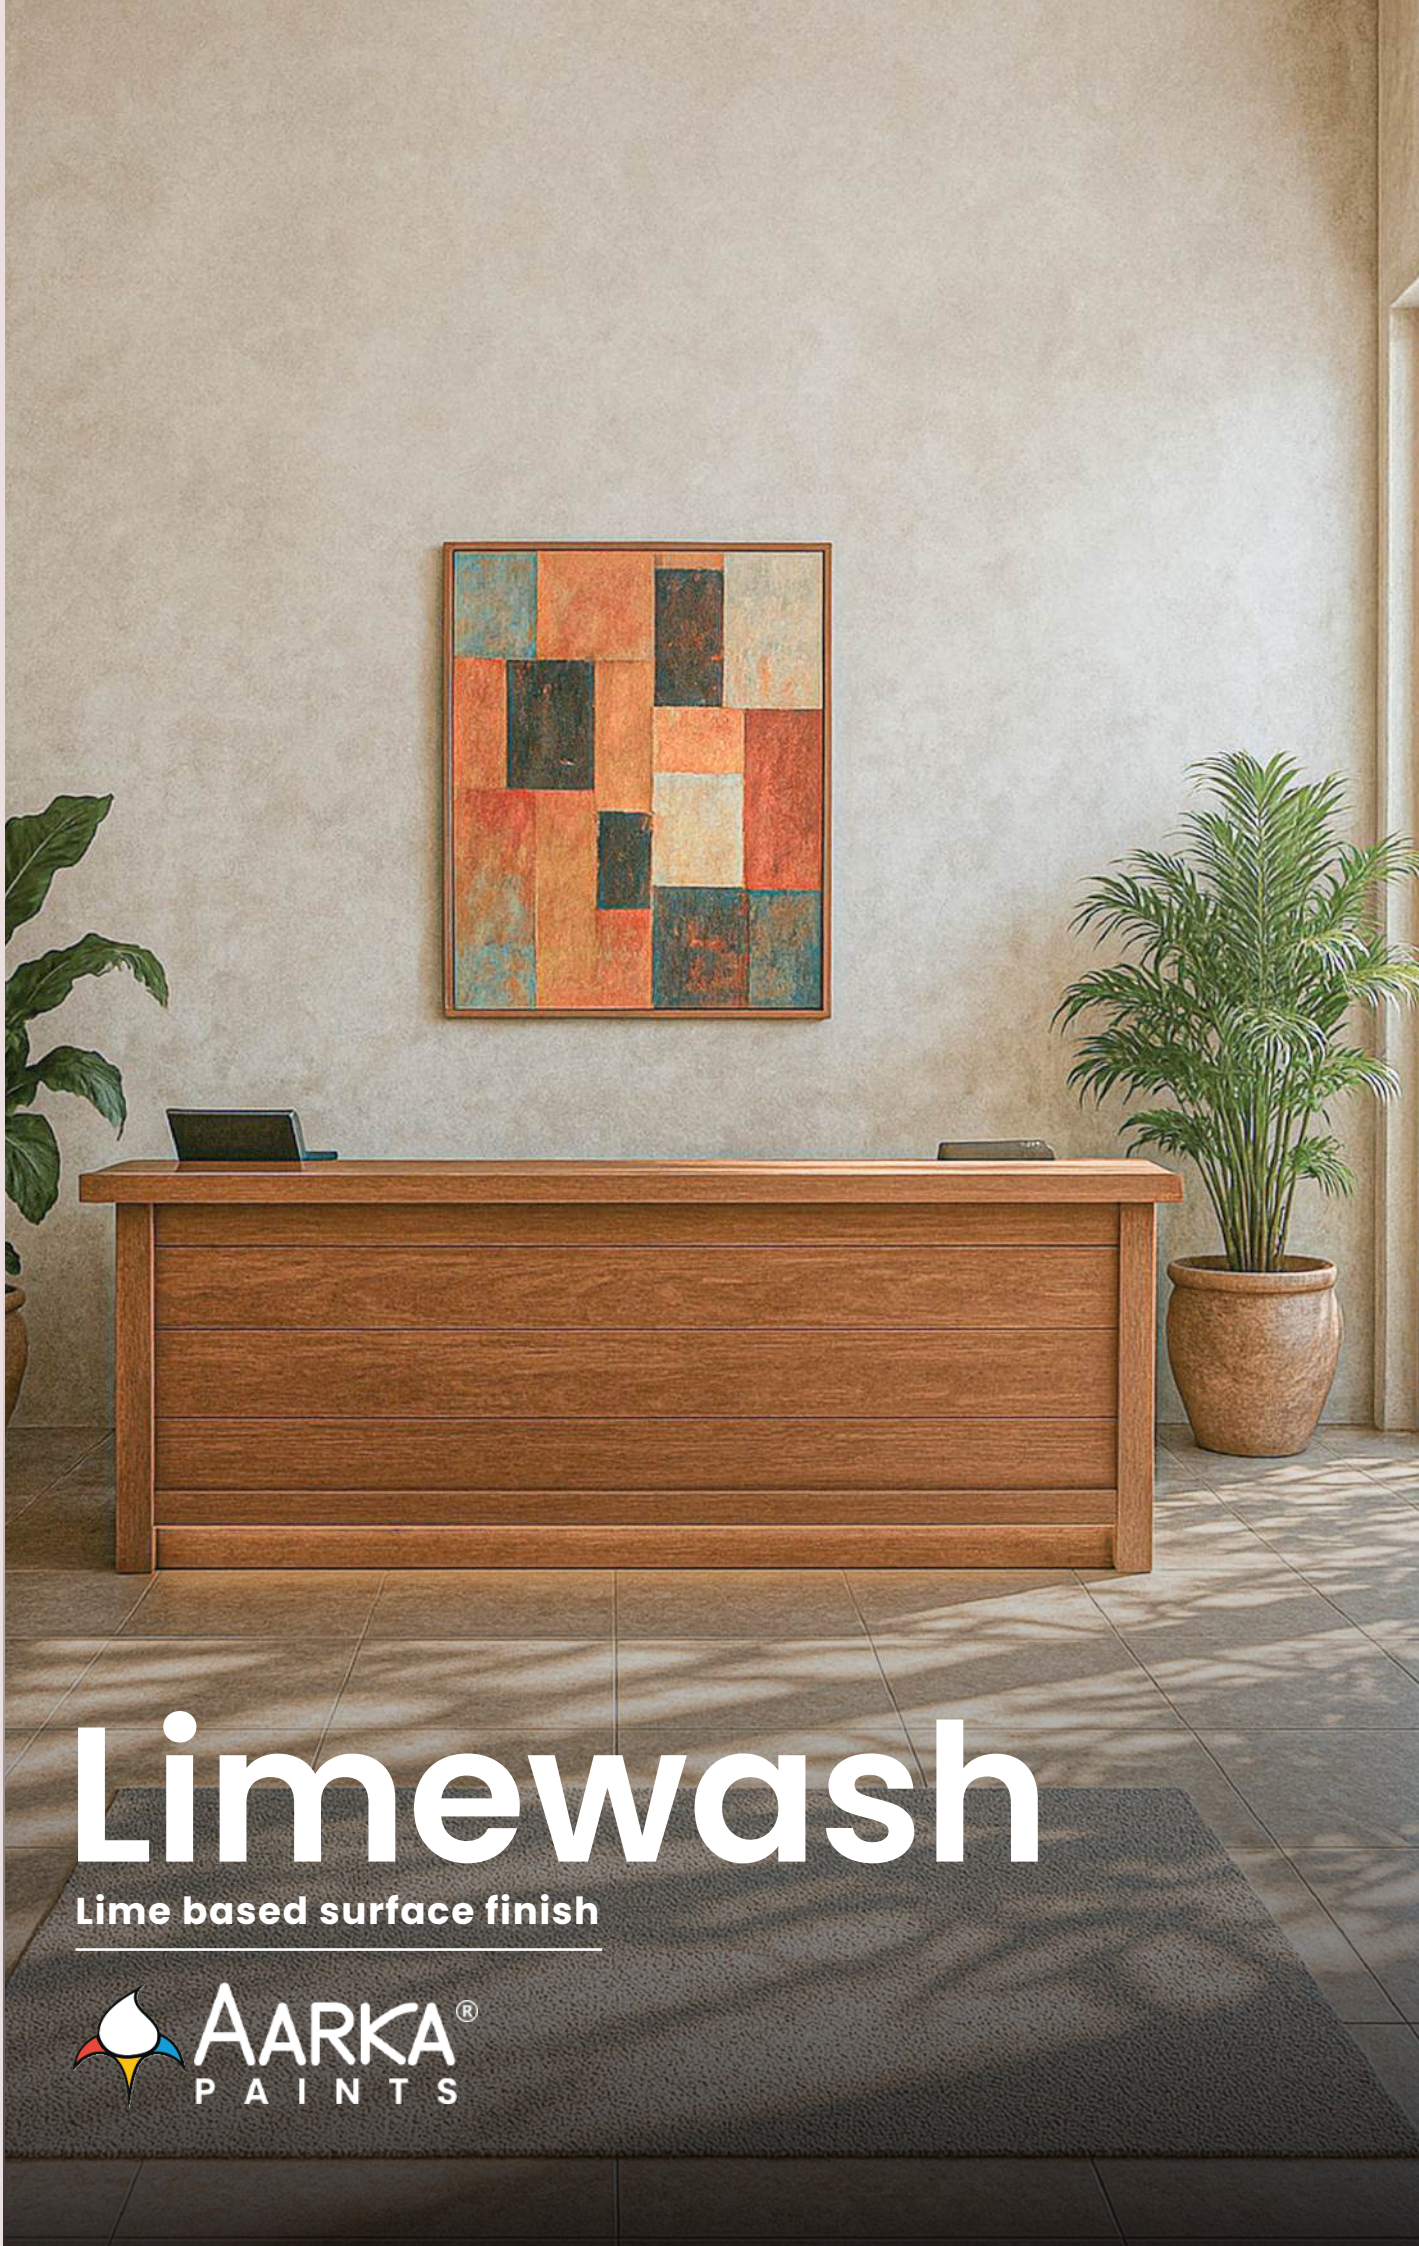

Limewash

Lime based surface finish

AARKA® PAINTS

LIME BASED

Limewash

Rooted in Tradition,
Made for Modern Living

Aarka Paints Lime Wash is a natural mineral-based coating that breathes life into walls with its soft, cloud-like finish and organic charm. Crafted using traditional lime techniques, it creates a velvety matte surface that gently catches light, giving depth and movement to any space.

Perfect for both modern and heritage-inspired interiors, Aarka Lime Wash brings a sense of calm and timelessness, while remaining fully eco-conscious.
Its breathable, non-toxic composition naturally resists mold and mildew, making it ideal for sustainable, healthy homes.



Product Details

Available package sizes :
1 kg, 5 kgs and 20 kgs

Area coverage :
30-40 Sq.ft per 1kg (2 coats)

Material thickness :
<0.5mm (2 coats)

Application tools :
Brush, Sponge, Roller

Suitable for interior surfaces






LWB + ARLW 21 + APC

Lime wash complements various finishes, helping tie together different parts of a space. Its soft, matte texture with natural variation adds depth without distraction, making it an ideal backdrop that unifies contrasting elements and creates a cohesive, well-balanced interior.

APC: Aarka Protective Coat LWB : Lime Wash Basecoat
ARLW: Aarka Lime Wash

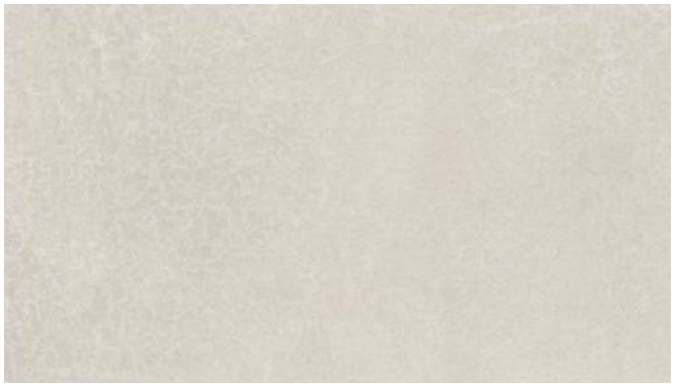

LWB + ARLW 01 + APC



LWB + ARLW 05 + APC


LWB + ARLW 02 + APC



LWB + ARLW 06 + APC




LWB + ARLW 03 + APC

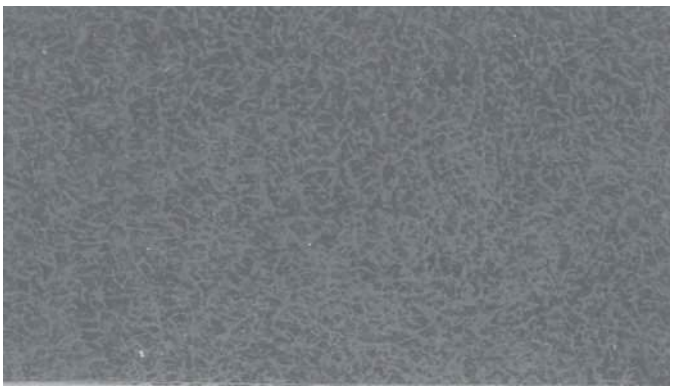

LWB + ARLW 07 + APC



LWB + ARLW 04 + APC

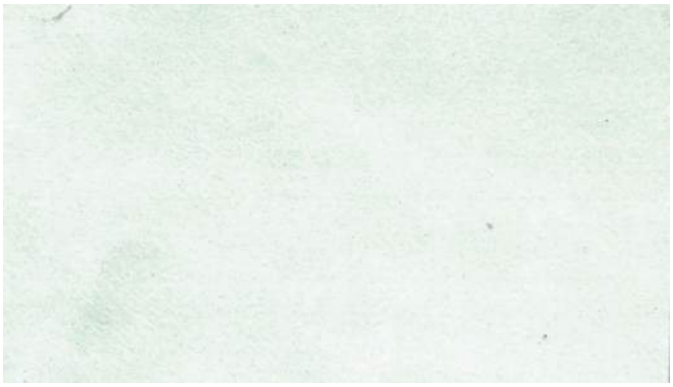

LWB + ARLW 08 + APC

LWB : Lime Wash Basecoat APC: Aarka Protective Coat

ARLW: Aarka Lime Wash



Cloudy Finish, Elegantly Grounded.

The natural lime composition creates a soft, diffused texture with subtle tonal variations, offering a refined matte finish that evokes rustic charm with an architectural sensibility.

All images shown are for representation purposes only. Actual product appearance may vary due to lighting, photography, Application technique, environmental conditions and display settings.




LWB + ARLW 09 + APC



LWB + ARLW 13 + APC



LWB + ARLW 10 + APC

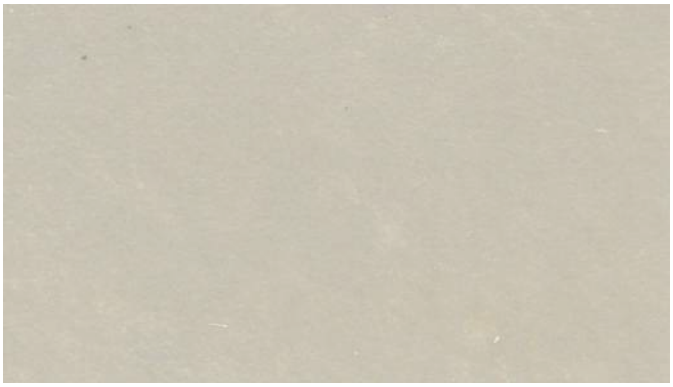

LWB + ARLW 14 + APC



LWB + ARLW 11 + APC



LWB + ARLW 15 + APC



LWB + ARLW 12 + APC




LWB + ARLW 16 + APC

LWB + ARLW 17 + APC




LWB + ARLW 21 + APC

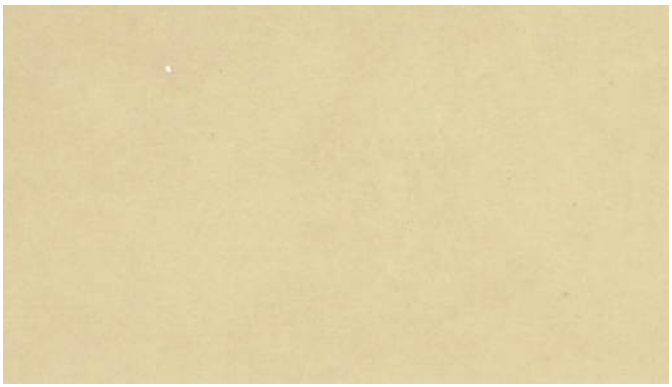


LWB + ARLW 18 + APC



LWB + ARLW 22 + APC

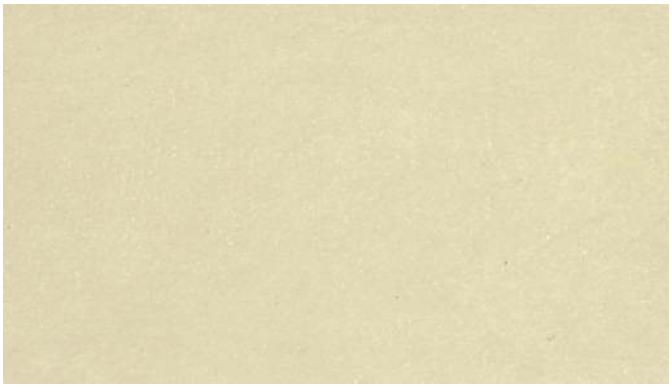

LWB + ARLW 19 + APC

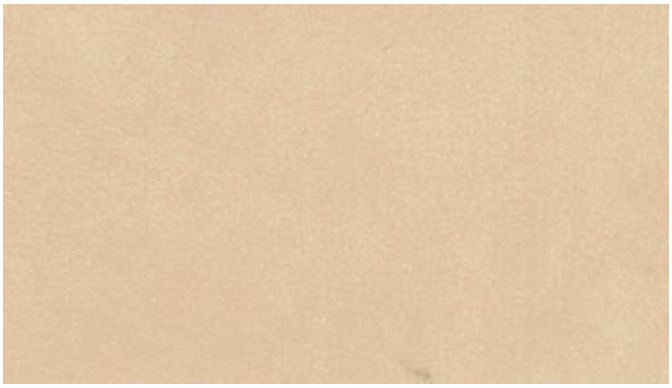

LWB + ARLW 23 + APC



LWB + ARLW 20 + APC



LWB + ARLW 24 + APC

APC: Aarka Protective Coat LWB : Lime Wash Basecoat

ARLW: Aarka Lime Wash



All images shown are for representation purposes only. Actual product appearance may vary due to lighting, photography, and display settings.

Application process

A detailed, step-by-step process for applying Lime wash texture:



All images shown are for representation purposes only. Actual product appearance may vary due to lighting, photography, and display settings.

1. Surface Preparation:

Wall Surface Preparation:

• Clean the wall thoroughly to remove dust, dirt, grease, or any loose particles.
• Ensure the surface is dry, smooth, and free of imperfections.
• Fill any cracks or holes with putty, sand it smooth, and wipe down the surface before moving forward.

MDF, Wood, and Other Surface Preparation:

• Clean the surface thoroughly to remove dust, dirt, grease, or any loose particles.
• Ensure the surface is dry, smooth, and free of imperfections.
• Fill any cracks or holes, sand them smooth, and wipe down the surface before moving forward.
• Apply two coats of a solvent-based primer (oil primer) to extend the durability of the surface.


Aarka Paints is not responsible for any color bleeding from MDF or similar boards that may occur during or after the application process. Any cracks developing at joints between two surfaces will result in compromising the final finish.

2. Application of Texture:

To apply Limewash by Aarka Paints:

- Application: Apply two coats of Lime wash Basecoat (LWB) on the desired wall. Allow 6-8 hours of dry time between the coats. Allow the basecoat to dry completely.
- Dilution: Add 10–20% potable water to lime wash paint and stir thoroughly.
- Use a natural bristle brush to apply thin, even coats over small sections. Work the material into the surface using varied strokes or a circular motion.
- Tools: A sponge or roller can also be used to create a soft, cloudy effect.
- Coats: Apply 2 coats. If a more subtle finish is desired, apply a third coat diluted 50% with water using a roller. This helps reduce texture variation and softens the overall appearance.
- Drying Time: Allow 6–8 hours of drying between coats.
- Creative Finish: For custom effects, layer two different lime wash colors.
- Topcoat: Once the final coat is dry, seal with Aarka Protective Coat (APC) to improve durability and surface protection.

The physical texture sample represents the intended color and finish; however, slight variations may occur in the final product due to inherent material properties and production processes. As texture coatings are applied manually, subtle differences in appearance are natural and contribute to the uniqueness of each surface. For optimal results, we recommend testing the texture on a small section before proceeding with full-scale application.

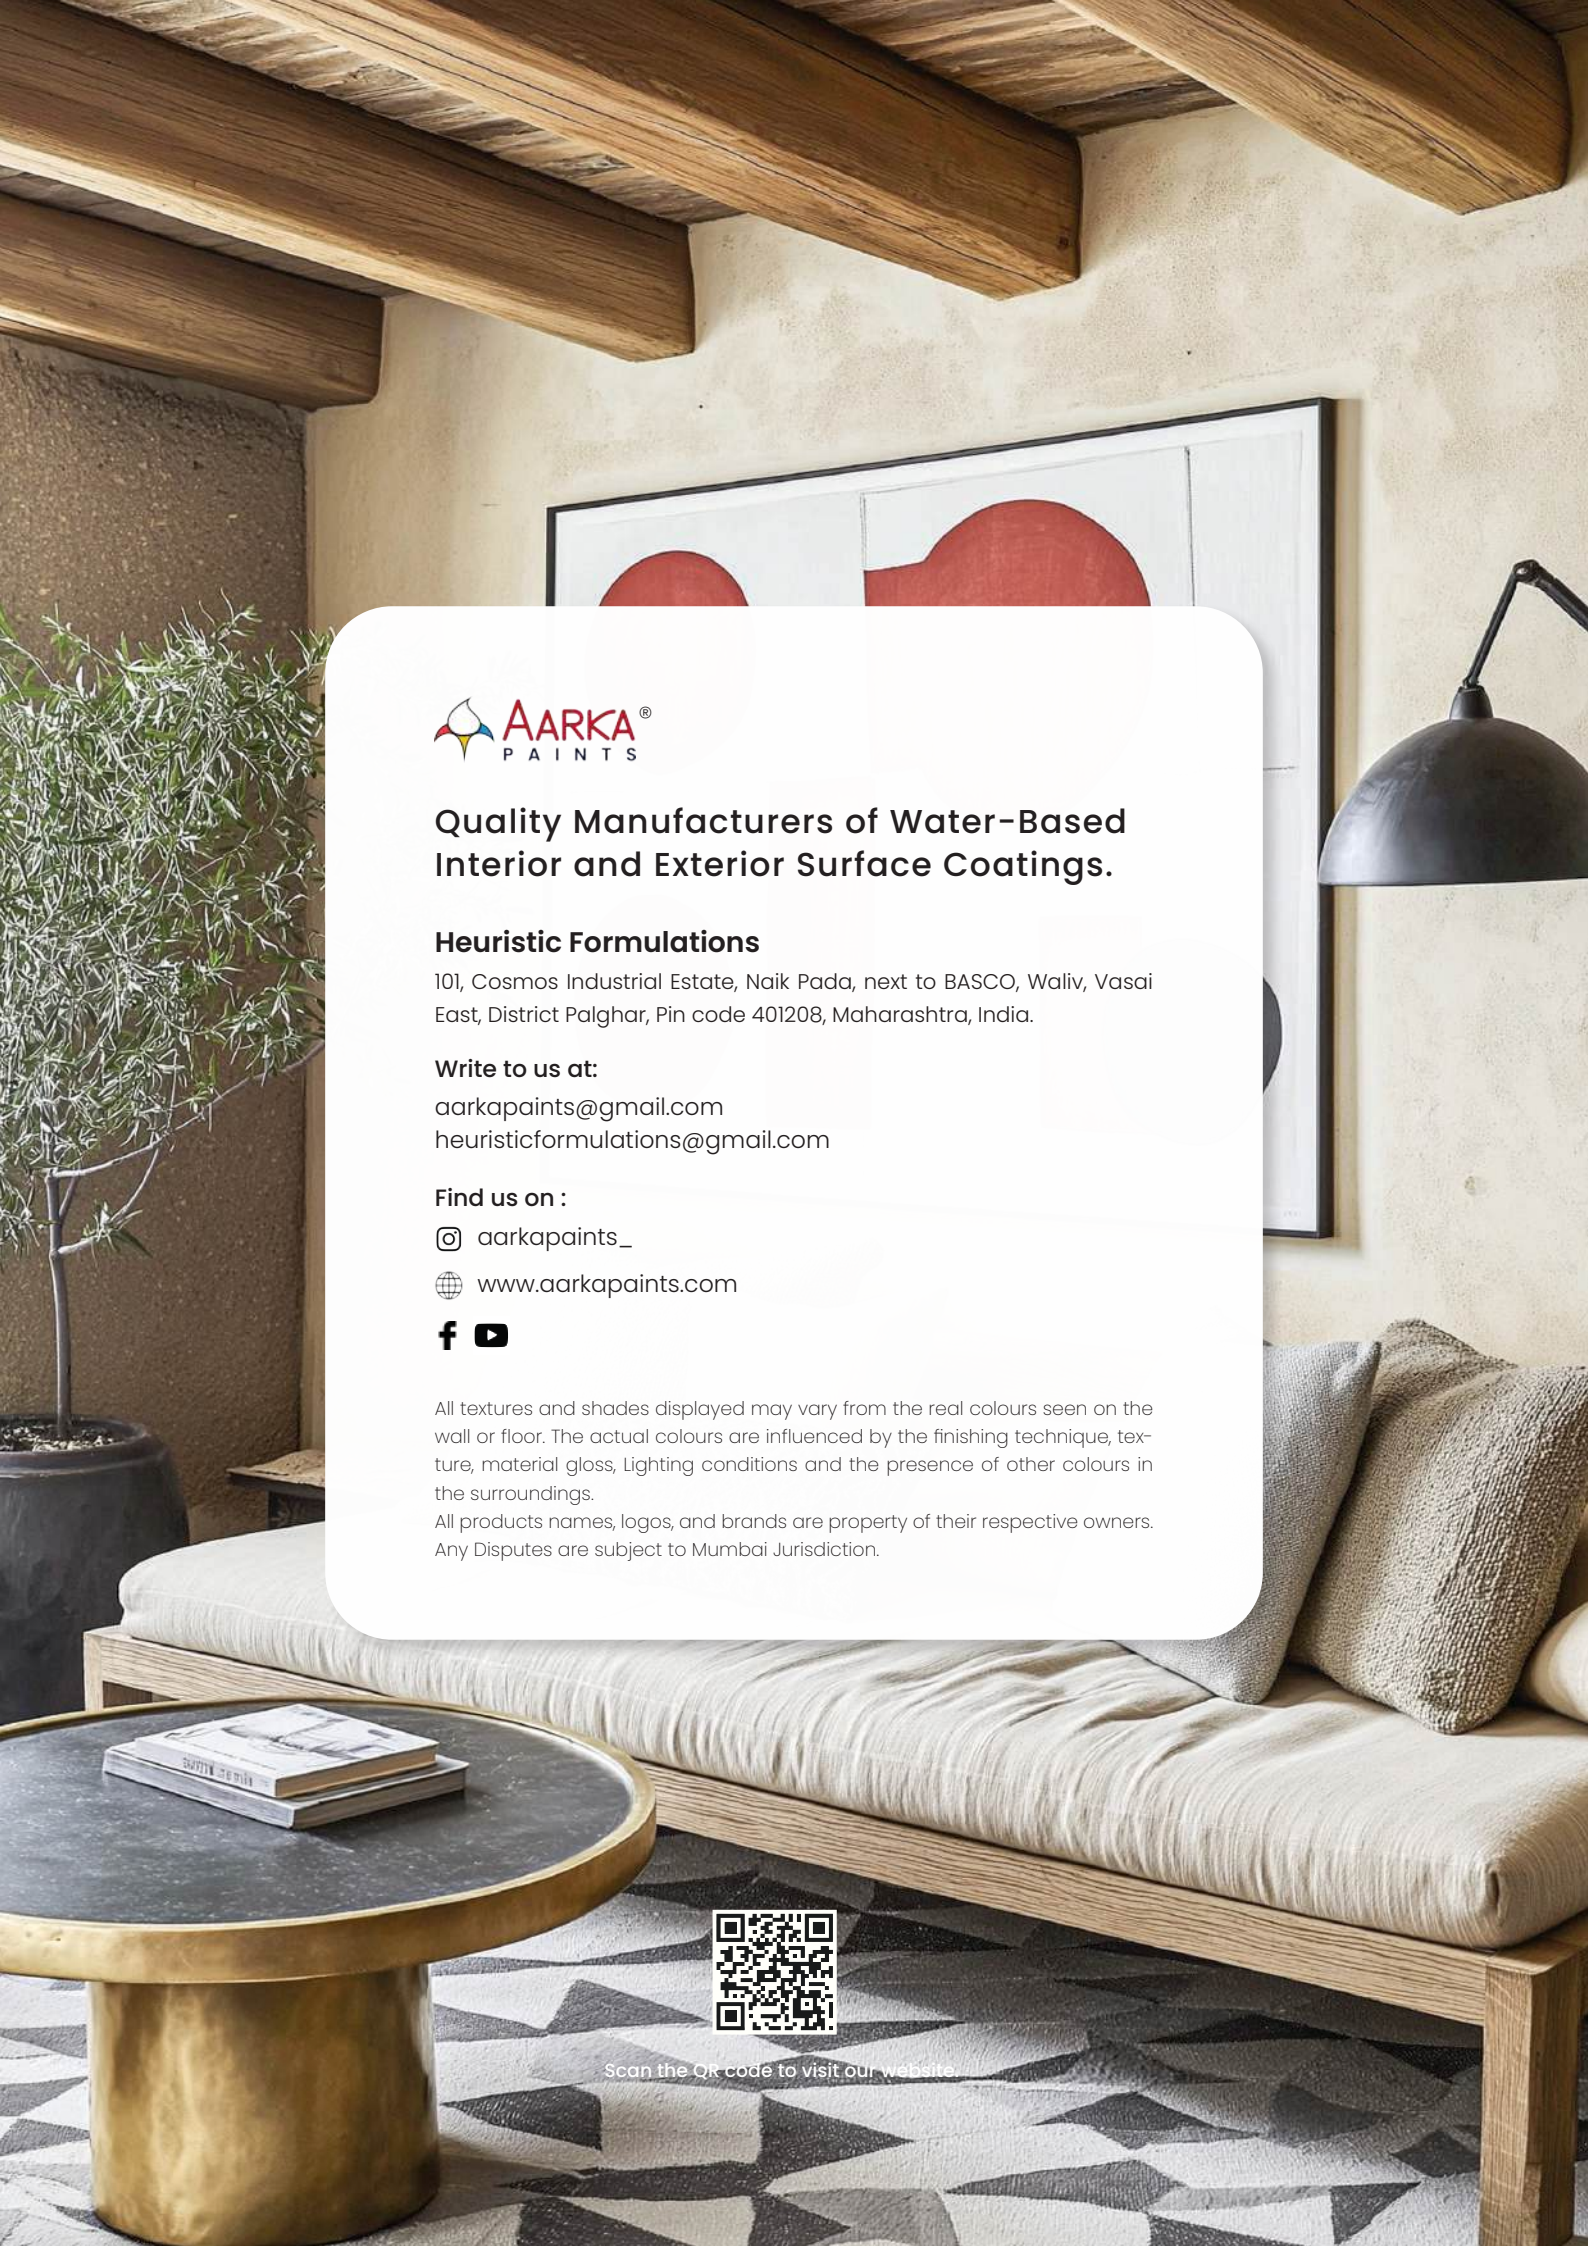

AARKA® PAINTS

Quality Manufacturers of Water-Based Interior and Exterior Surface Coatings.

Heuristic Formulations

101, Cosmos Industrial Estate, Naik Pada, next to BASCO, Waliv, Vasai East, District Palghar, Pin code 401208, Maharashtra, India.

Write to us at:

aarkapaints@gmail.com
heuristicformulations@gmail.com

Find us on :

aarkapaints_

www.aarkapaints.com

All textures and shades displayed may vary from the real colours seen on the wall or floor. The actual colours are influenced by the finishing technique, texture, material gloss, Lighting conditions and the presence of other colours in the surroundings.
All products names, logos, and brands are property of their respective owners. Any Disputes are subject to Mumbai Jurisdiction.

Scan the Qr code to visit our website