A Tactile Experience, Inspired by Nature



Silcol

Mineral based surface coating

AARKA® PAINTS

Silcol



Silcol

A Tactile Experience, Inspired by Nature

Aarka Paints Silcol is a premium texture paint that offers a stunning, **grainy finish** inspired by the natural beauty of stone. Designed to bring depth and character to any surface, Silcol creates a textured, granular look that enhances walls with a tactile and visually dynamic feel.

Ideal for both **interiors and exteriors**, Silcol adds a timeless, natural element to any space while offering durability and resistance to wear. Its refined, earth-inspired finish is perfect for making bold, stylish statements in high-end residential or commercial projects.

*Silcol is crafted from **natural minerals and stones**, giving it an authentic, organic texture. Due to the natural components, slight variations in color and texture may occur from batch to batch, adding to its unique, natural appeal.*

Product Details





Avalable package sizes :
5 kgs and 28 kgs

Area coverage :
80-90 Sq.ft per 28kgs (2 coats)

Material thickness :
2-3mm (2 coats)

Application tools :
Trowel or Spray gun (4-10mm nozzle)

Suitable for interior and exteriors

Granular Finish, Boldly Refined.

The embedded granules provide a multidimensional appearance, delivering a rich, sophisticated texture that combines rugged elegance with modern design.





ASL 01 + APC




ASL 02 + APC




ASL 03 + APC



ASL 04 + APC

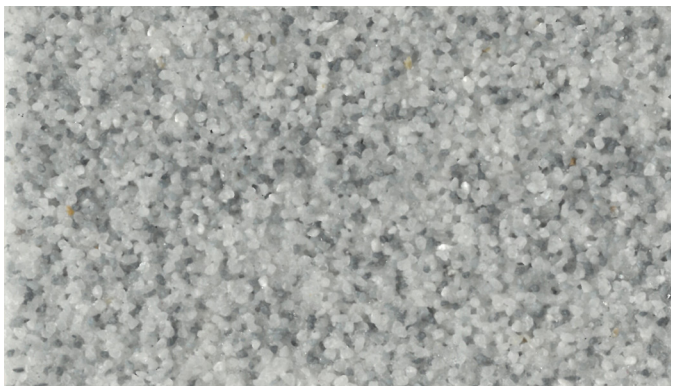

ASL 05 + APC

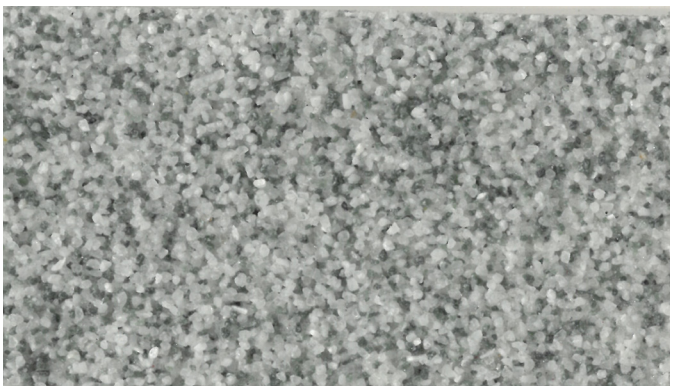

ASL 06 + APC



ASL 07 + APC




ASL 08 + APC


APC: Aarka Protective Coat




ASL 09 + APC

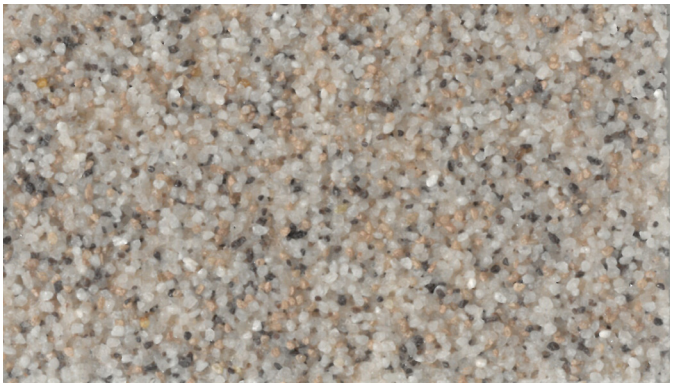

ASL 10 + APC

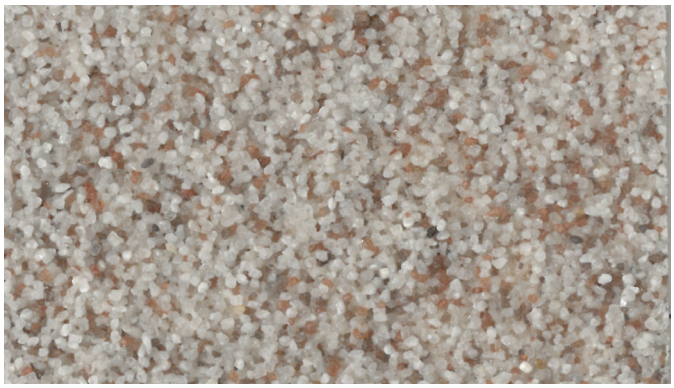


ASL 11 + APC

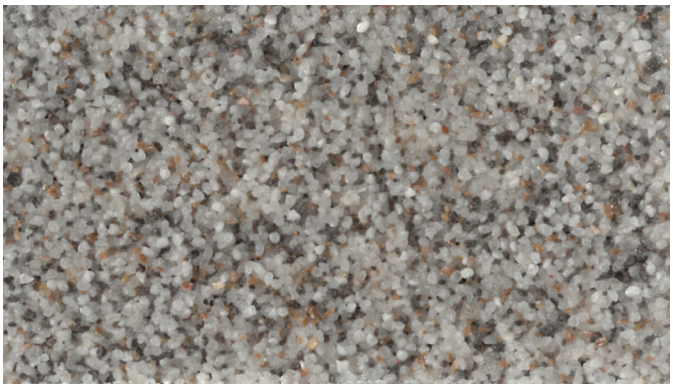

ASL 12 + APC




ASL 13 + APC

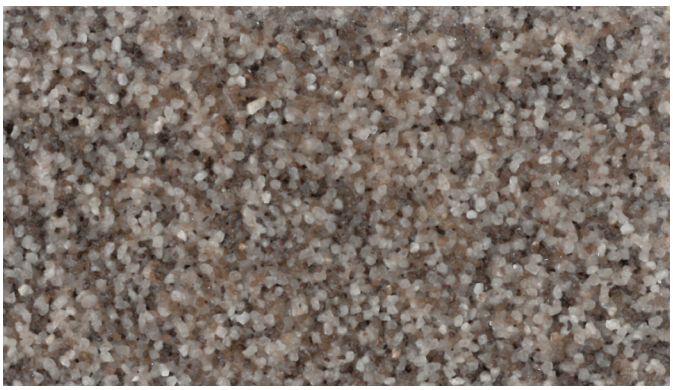

ASL 14 + APC



ASL 15 + APC

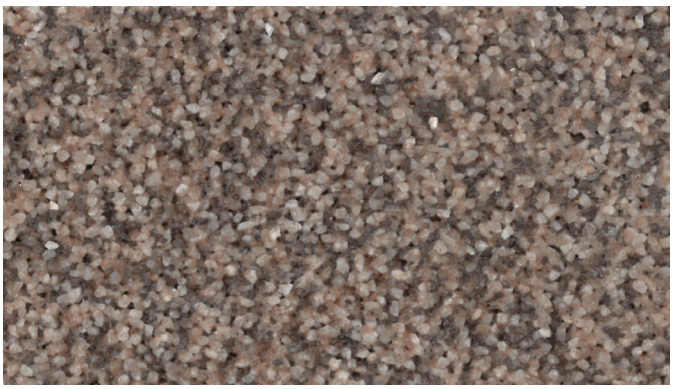

ASL 16 + APC

APC: Aarka Protective Coat





ASL 17 + APC



ASL 18 + APC



ASL 19 + APC



ASL 20 + APC

APC: Aarka Protective Coat



ASL 21 + APC



ASL 22 + APC



ASL 23 + APC



ASL 24 + APC



ASL 25 + APC



ASL 26 + APC



ASL 27 + APC




ASL 28 + APC

APC: Aarka Protective Coat







ASL 29 + APC

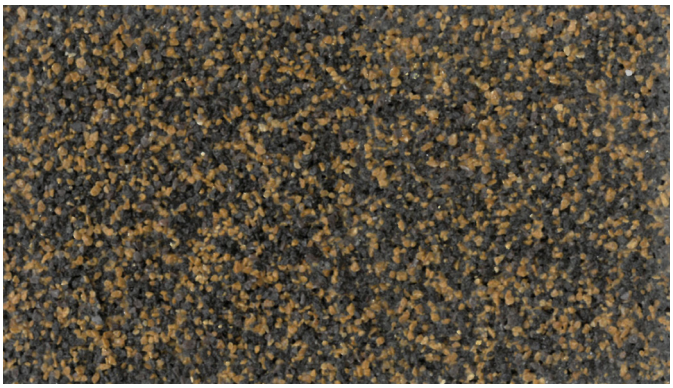


ASL 30 + APC

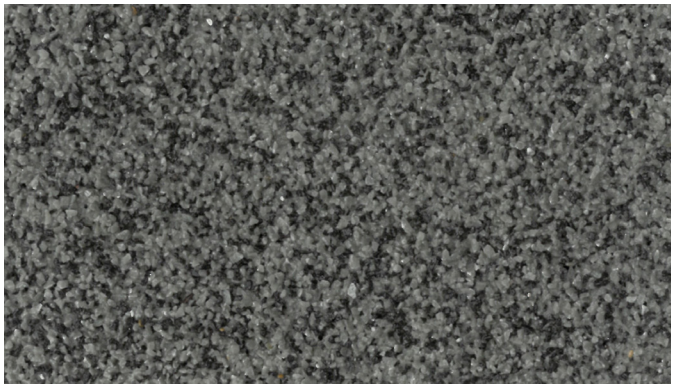

ASL 31 + APC

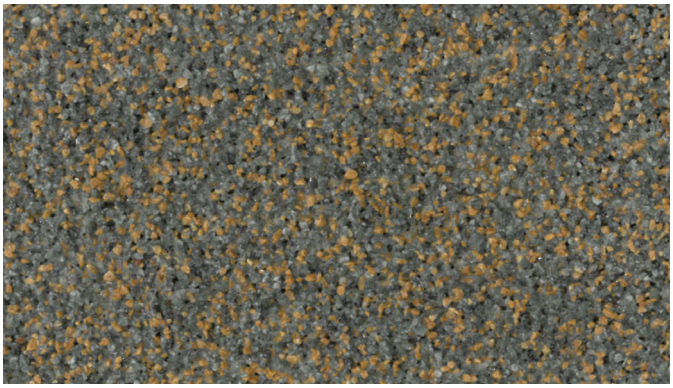

ASL 32 + APC

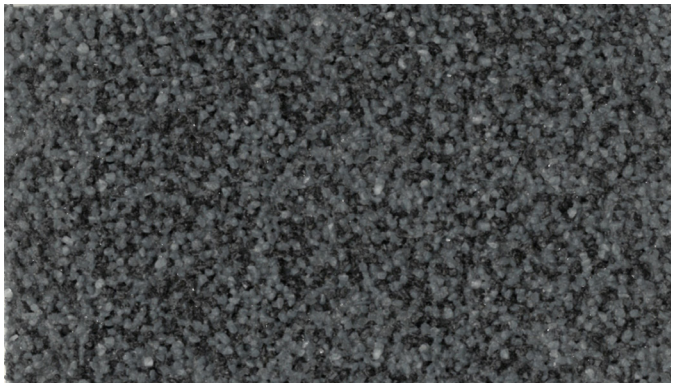

ASL 33 + APC



ASL 34 + APC

APC: Aarka Protective Coat






Shimmering Shades


Enhance the effect with the dazzle of **Mica**




ASL 35 + APC

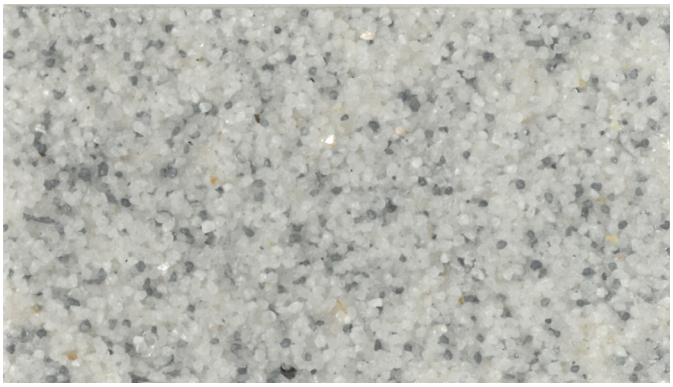


ASL 36 + APC

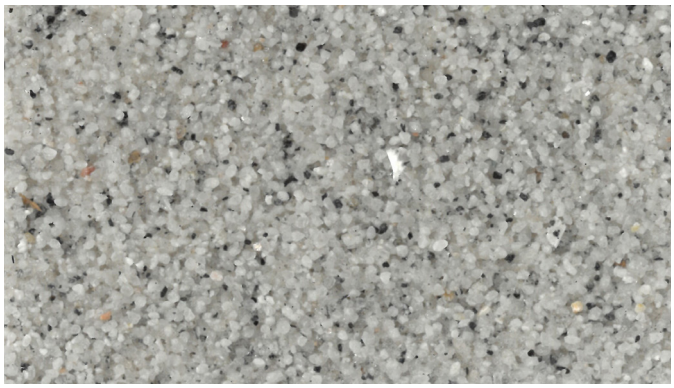


ASL 37 + APC

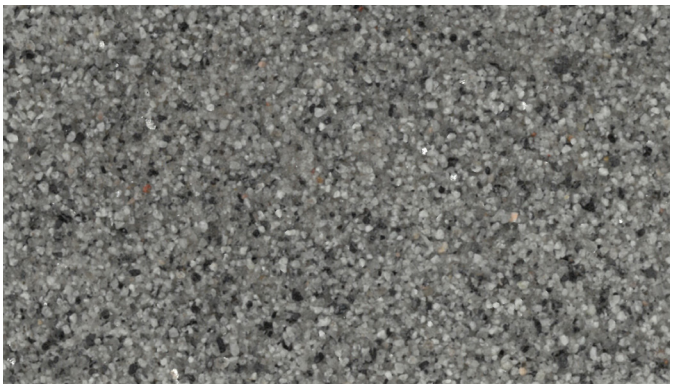

ASL 38 + APC

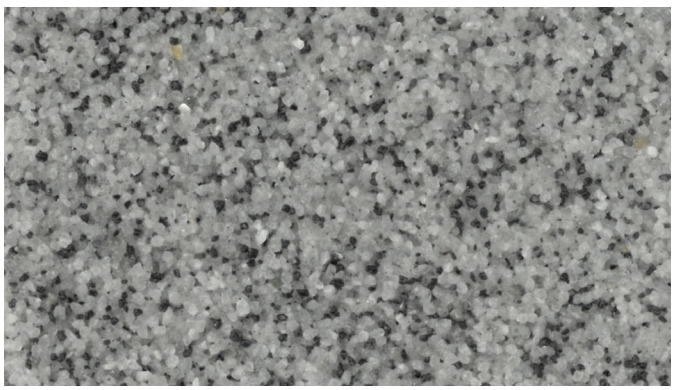

ASL 39 + APC

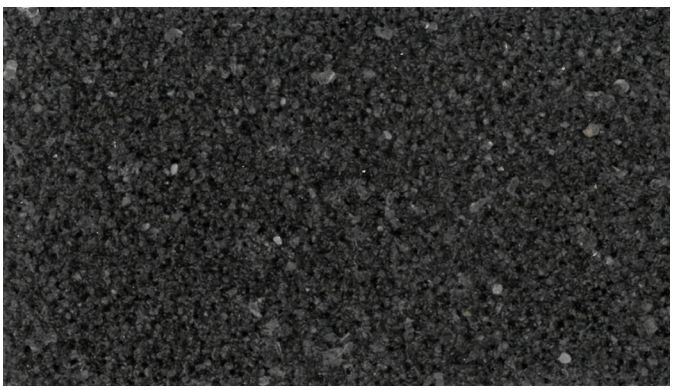


ASL 40 + APC

APC: Aarka Protective Coat

* Mica can be added to any Silcol shade upon request

Application process

A detailed, step-by-step process for applying Silcol texture paint:

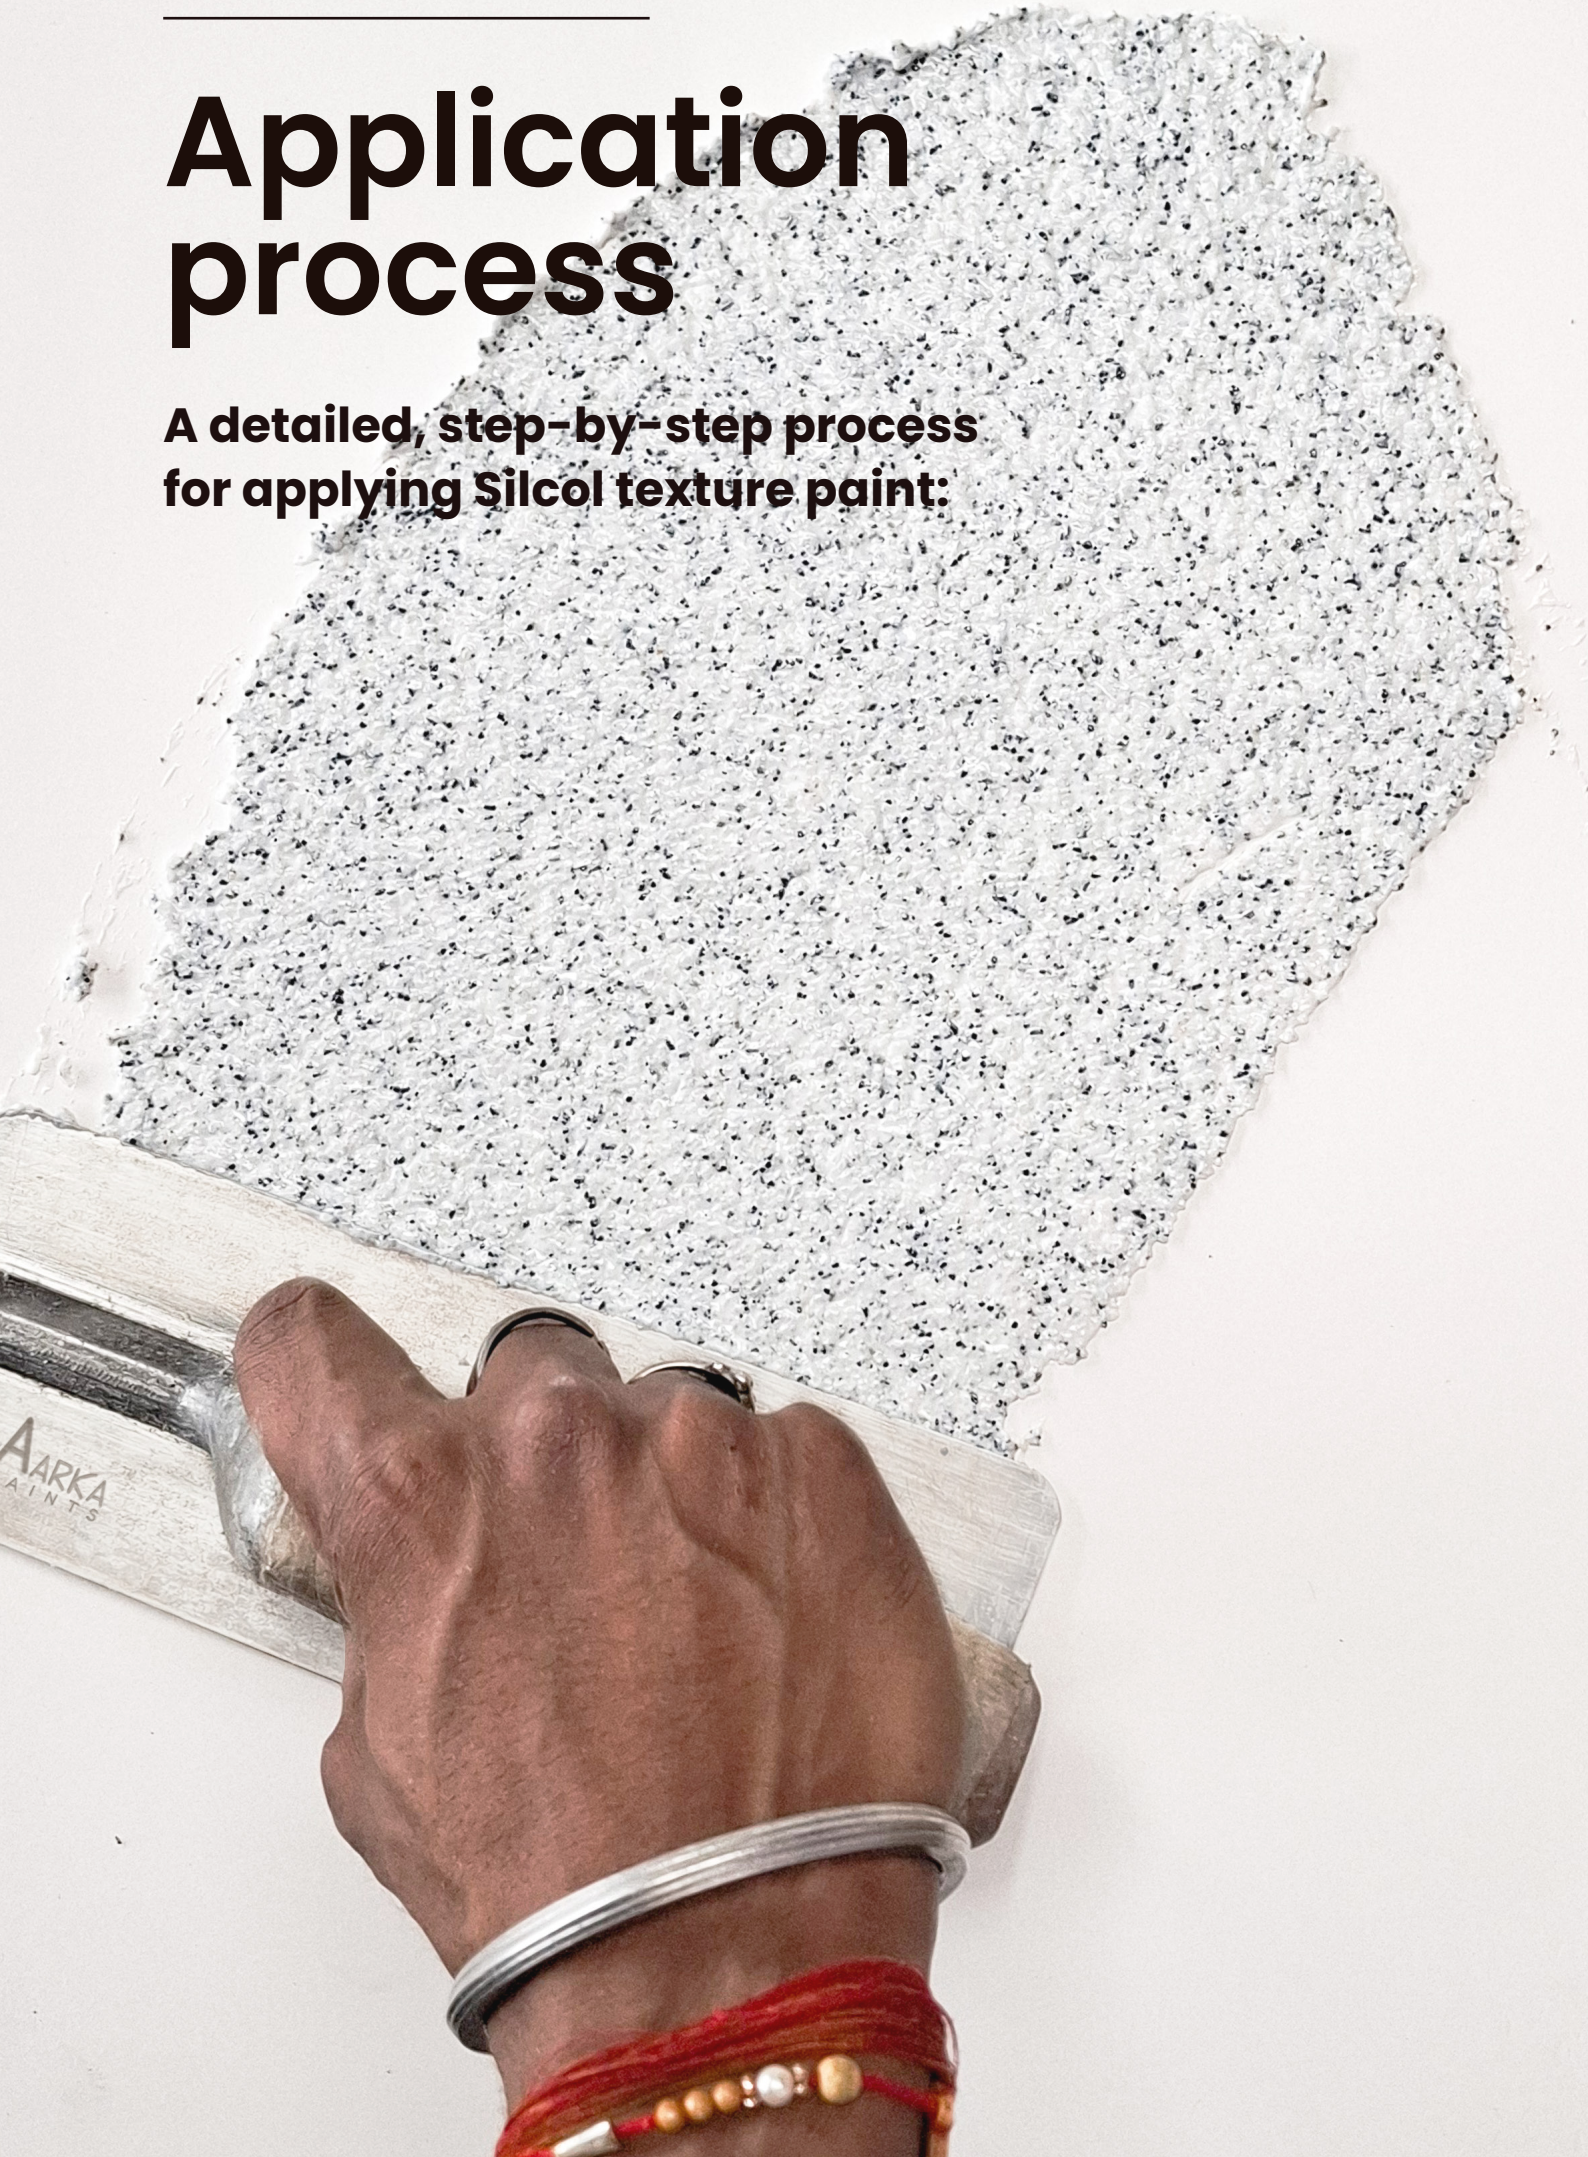

1. Surface Preparation:

Wall Surface Preparation:
• Clean the wall thoroughly to remove dust, dirt, grease, or any loose particles.
• Ensure the surface is dry, smooth, and free of imperfections.
• Fill any cracks or holes with putty, sand it smooth, and wipe down the surface before moving forward.

MDF, Wood, and Other Surface Preparation:
• Clean the surface thoroughly to remove dust, dirt, grease, or any loose particles.
• Ensure the surface is dry, smooth, and free of imperfections.
• Fill any cracks or holes, sand them smooth, and wipe down the surface before moving forward.
• Apply two coats of a solvent-based primer (oil primer) to extend the durability of the surface.

Aarka Paints is not responsible for any color bleeding from MDF or similar boards that may occur during or after the application process.

2. Aarka Primer Application:

• Apply 2 coats of Aarka Primer of the same color as the selected Silcol top coat to the entire surface. This ensures better adhesion of the texture paint and uniformity of color.
• Allow the primer coats to dry completely, typically for 6-8 hours depending on environmental conditions like humidity.

3. Application of Texture:

First Texture Coat:
• Mix the minerals and paste throughly to prepare the top coat.
• Dilute the first coat of Silcol texture paint by adding 10-15% water to the paint mixture. Stir thoroughly to ensure even consistency.
• Using a trowel, apply the first coat evenly across the surface. Focus on spreading the texture evenly while achieving a granular, stone-like effect.
• Ensure the coat is applied smoothly and there are no visible lumps or patches.
• Allow the first coat to dry for 10-12 hours. Drying time may vary depending on climate and humidity levels.

Second Texture Coat:
• Once the first coat has dried completely, proceed to the second coat with the same Dilution as before.
• Using the trowel again, apply a second coat to enhance the texture and depth. This layer builds upon the first coat, creating the desired grainy, dimensional finish.
• Allow this coat to dry for 10-12 hours, depending on the climate, ensuring the texture is completely set before moving on to the protective layer.



Application of Aarka Clear Protective Coat (APC):


- Once the Silcol texture is fully dried, apply the first coat of Aarka Protective Coat using a brush or roller. This protective layer enhances durability, protecting the texture from external elements like moisture, dirt, and UV exposure.
- Let the first coat dry for 8-10 hours to ensure it bonds properly with the texture layer.
- Apply the second coat of Aarka Clear Protective Coat after the drying interval, evenly spreading it across the surface for enhanced protection and a smooth finish.
- Allow this final layer to dry completely before using or exposing the surface to any contact.

Silcol can also be sprayed with 4mm - 10mm nozzles for a more efficient application method.

The physical texture sample represents the intended color and finish; however, slight variations may occur in the final product due to inherent material properties and production processes. As texture coatings are applied manually, subtle differences in appearance are natural and contribute to the uniqueness of each surface. For optimal results, we recommend testing the texture on a small section before proceeding with full-scale application.



All images shown are for representation purposes only. Actual product appearance may vary due to lighting, photography, and display settings.

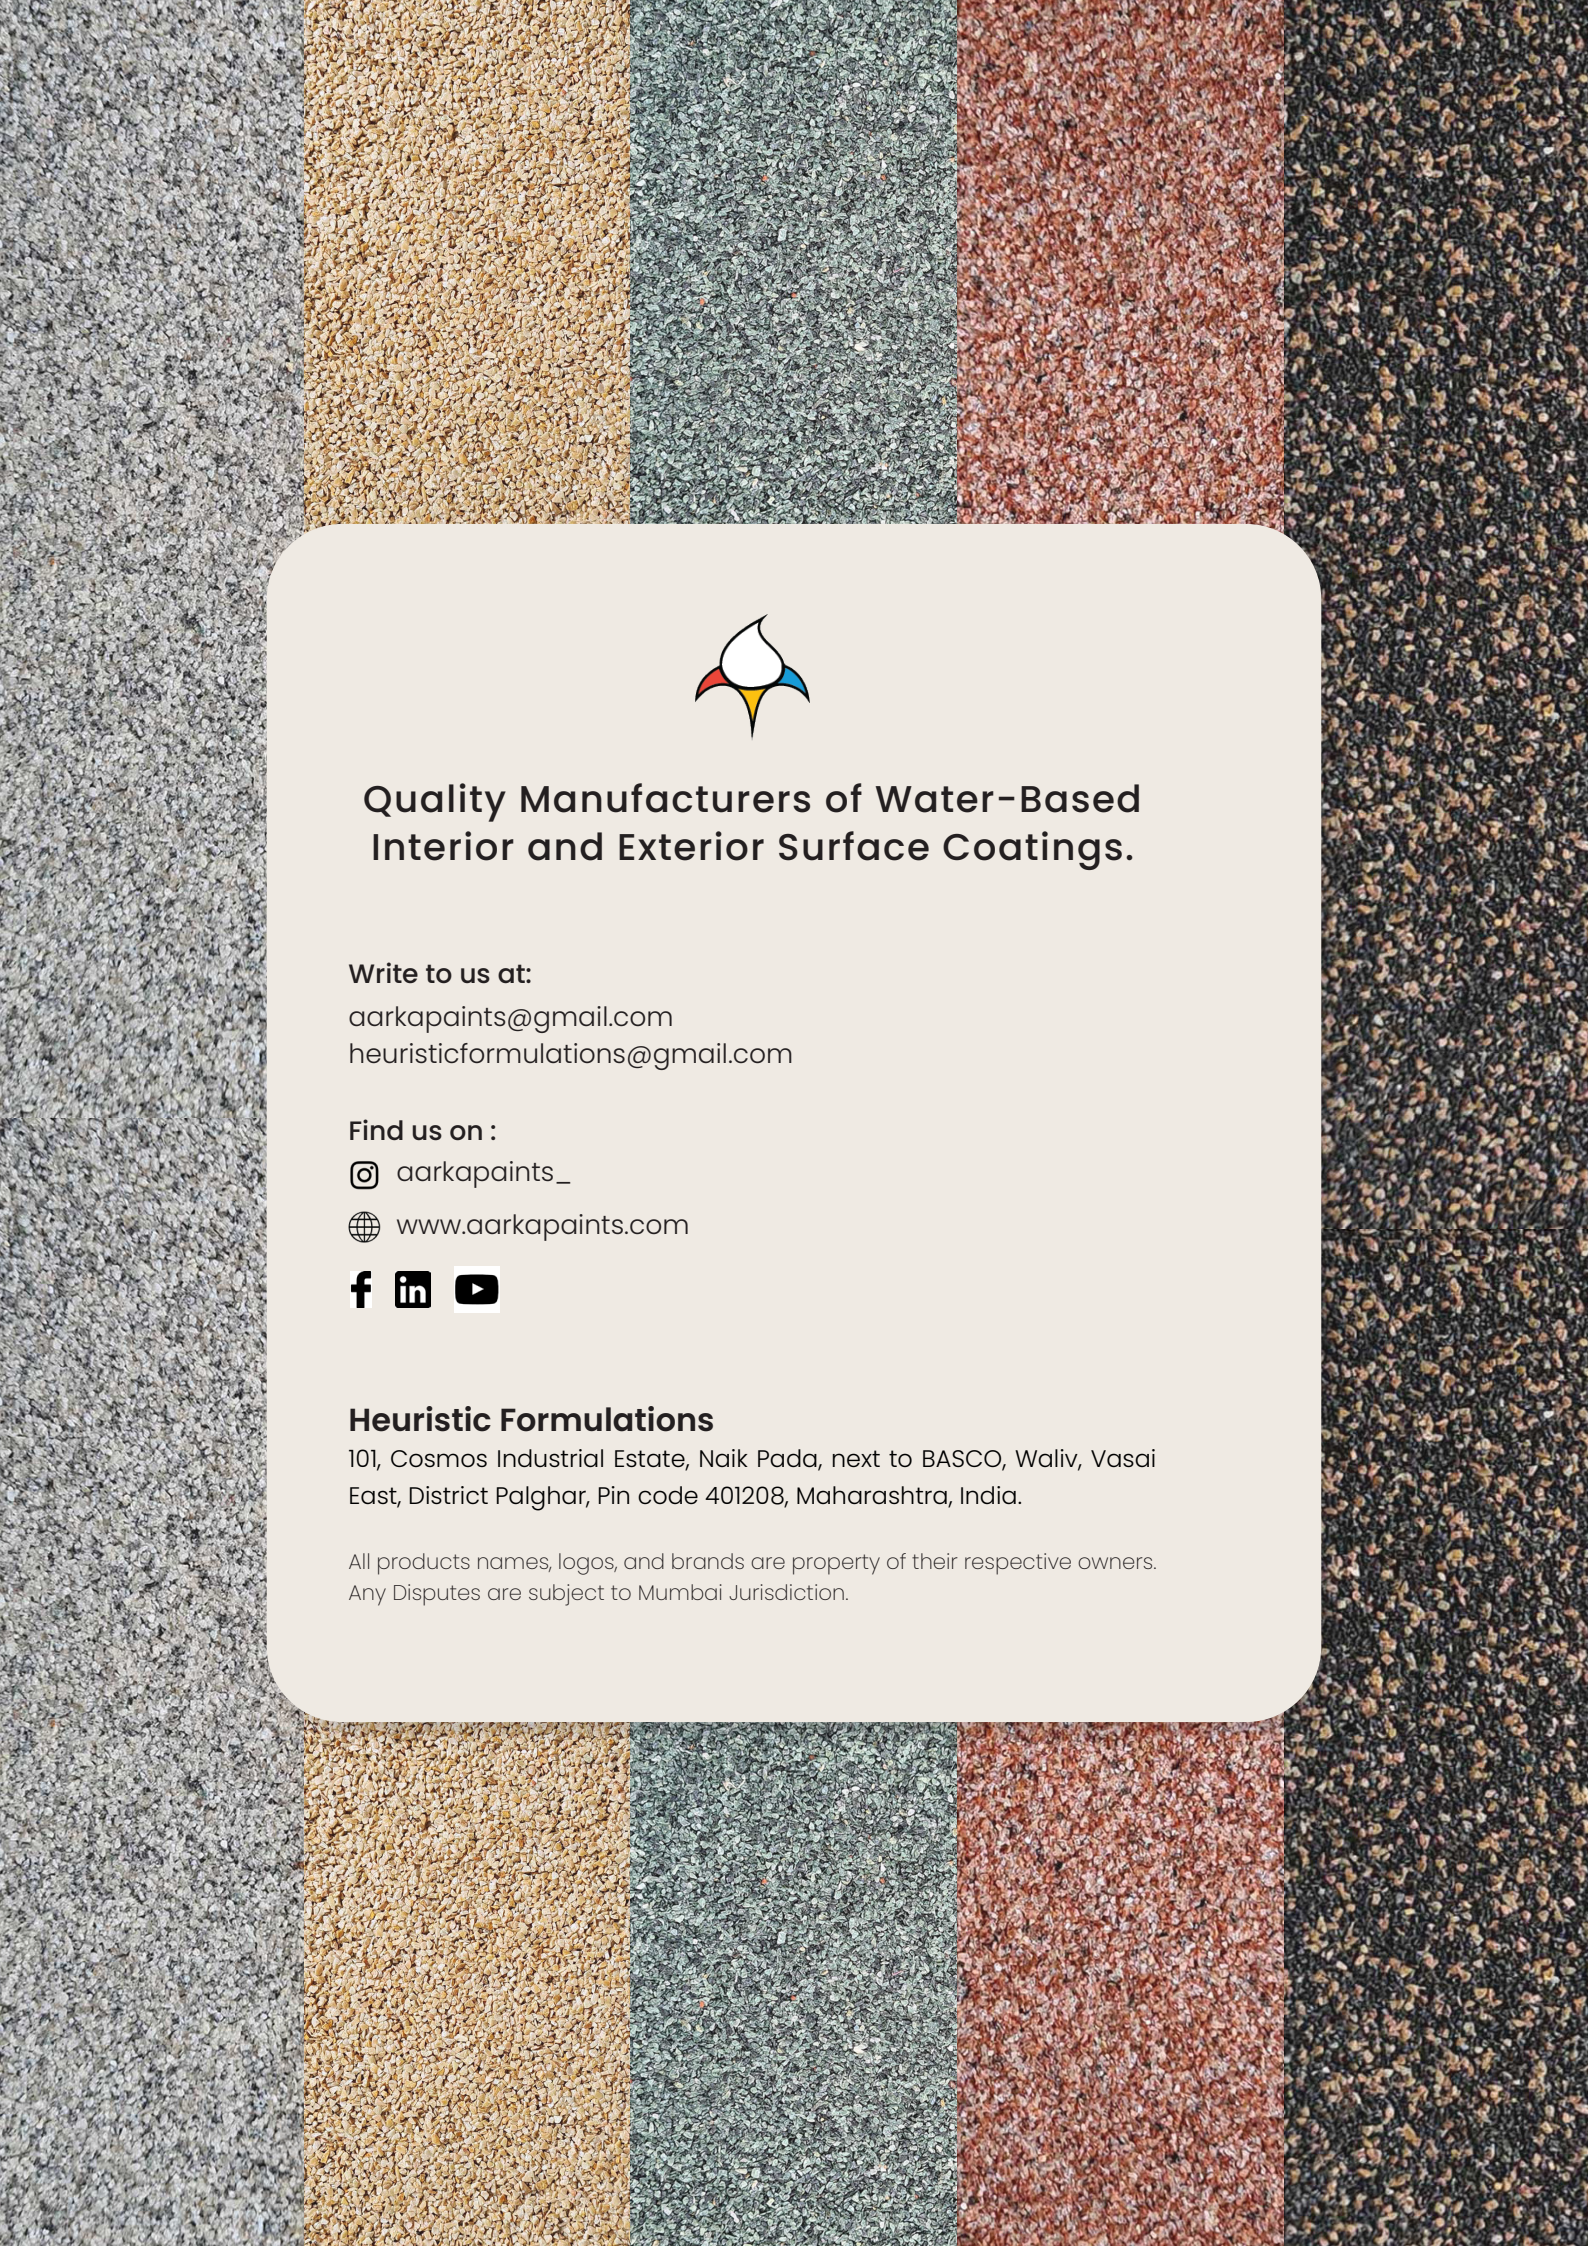

Quality Manufacturers of Water-Based Interior and Exterior Surface Coatings.

Write to us at:

aarkapaints@gmail.com
heuristicformulations@gmail.com

Find us on :

aarkapaints_

www.aarkapaints.com

Heuristic Formulations

101, Cosmos Industrial Estate, Naik Pada, next to BASCO, Waliv, Vasai East, District Palghar, Pin code 401208, Maharashtra, India.

All products names, logos, and brands are property of their respective owners. Any Disputes are subject to Mumbai Jurisdiction.