AARKA® PAINTS

Durable texture, timeless expression

MINERAL BASED



MODERA LIME

Soft, chalky lime texture with a natural artistic smudged elegance.



All images shown are for representation purposes only. Actual product appearance may vary due to application process, environmental settings, lighting, photography, and display settings.

Product Details

Available package sizes :
1kg, 5 kgs and 20 kgs

Area coverage :
160 - 180 Sq.ft per 20 kgs (2 coats)

Material thickness :
200 - 300 microns (2 coats)

Application tools :
Trowel, Fillipos tool

Suitable for interior surfaces



AQBF + ARMO Plain



All images shown are for representation purposes only. Actual product appearance may vary due to application process, environmental settings, lighting, photography and display settings.

Modera Lime | 4

AQBF : Aarka Qrartz Base Fine

ARMO : Aarka Modera Lime



All images shown are for representation purposes only. Actual product appearance may vary due to application process, environmental settings, lighting, photography and display settings.

AQBF + ARMO Rough




AQBF : Aarka Qrartz Base Fine

ARMO : Aarka Modera Lime



AQBF + ARMO 01

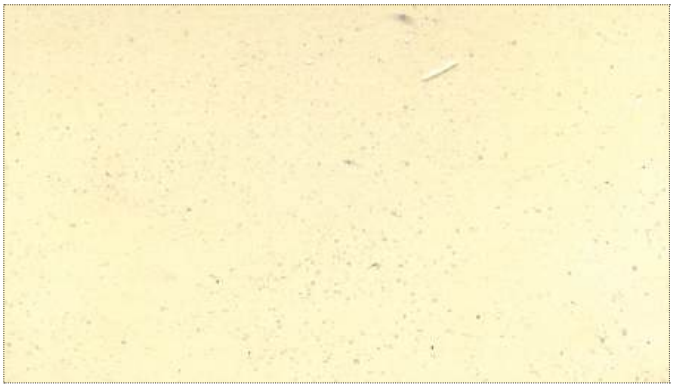

AQBF + ARMO 02



AQBF + ARMO 03



AQBF + ARMO 04



AQBF + ARMO 05



AQBF + ARMO 06



AQBF + ARMO 07



AQBF + ARMO 08

AQBF : Aarka Qrartz Base Fine

ARMO : Aarka Modera Lime



AQBF + ARMO 09



AQBF + ARMO 10



AQBF + ARMO 11



AQBF + ARMO 12




AQBF + ARMO 13



AQBF + ARMO 14



AQBF + ARMO 15

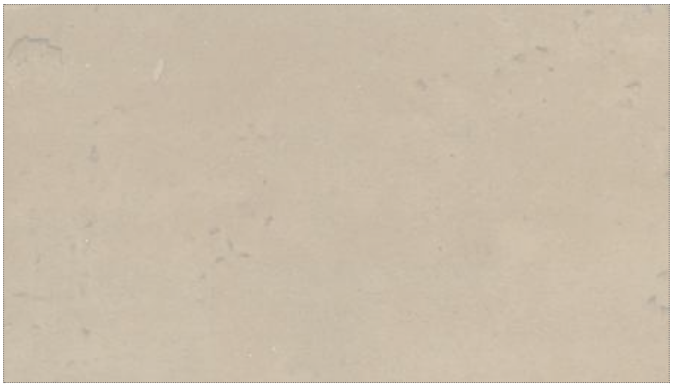

AQBF + ARMO 16

AQBF : Aarka Qrartz Base Fine


ARMO : Aarka Modera Lime




AQBF + ARMO 17



AQBF + ARMO 18

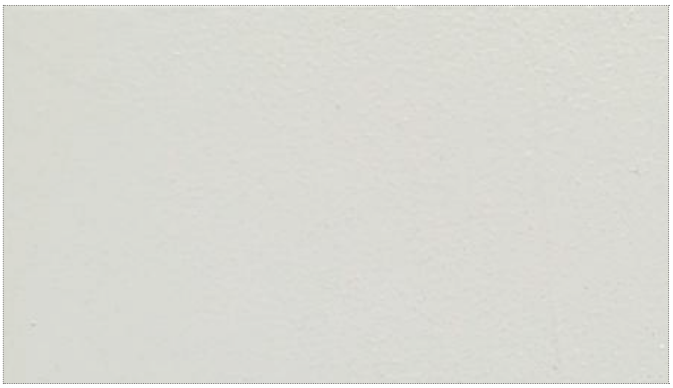


AQBF + ARMO 19

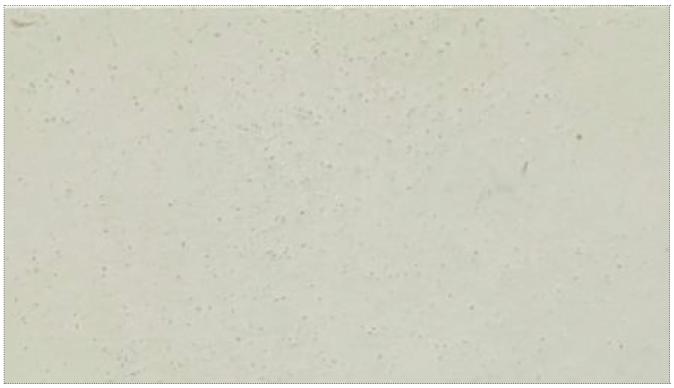

AQBF + ARMO 20




AQBF + ARMO 21

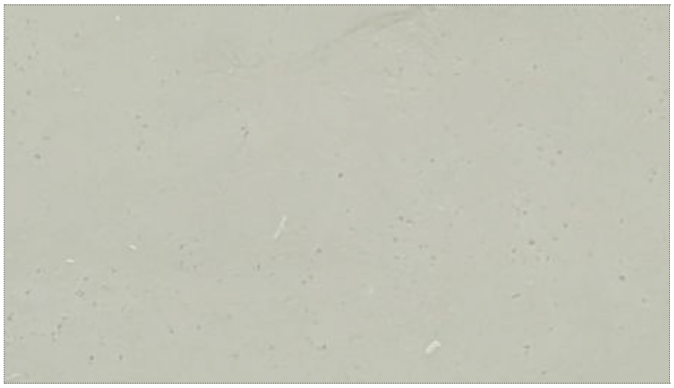

AQBF + ARMO 22



AQBF + ARMO 23

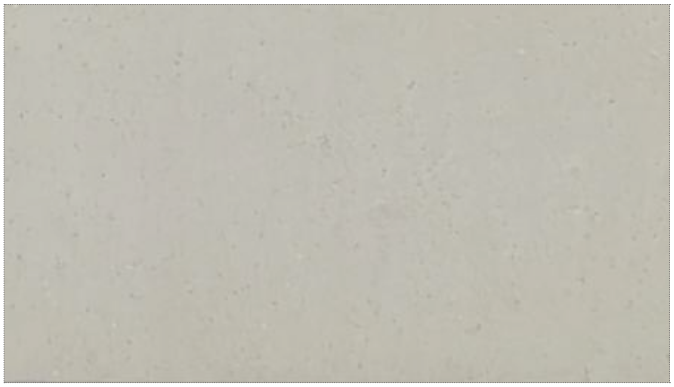

AQBF + ARMO 24

AQBF : Aarka Qrartz Base Fine

ARMO : Aarka Modera Lime

Texture that complements, never competes.



All images shown are for representation purposes only. Actual product appearance may vary due to application process, environmental settings, lighting, photography, and display settings.



Application process

A detailed, step-by-step process for applying Marbre Ciceo texture:

1. Surface Preparation:

Wall Surface Preparation:

- Clean the wall thoroughly to remove dust, dirt, grease, or any loose particles.
- Ensure the surface is dry, smooth, and free of imperfections.
- Fill any cracks or holes with putty, sand it smooth, and wipe down the surface before moving forward.

MDF, Wood, and Other Surface Preparation:

- Clean the surface thoroughly to remove dust, dirt, grease, or any loose particles.
- Ensure the surface is dry, smooth, and free of imperfections.
- Fill any cracks or holes, sand them smooth, and wipe down the surface before moving forward.
- Apply two coats of a solvent-based primer (oil primer) to extend the durability of the surface.

Aarka Paints is not responsible for any color bleeding from MDF or similar boards that may occur during or after the application process. Any cracks developing at joints between two surfaces will result in compromising the final finish.

All images shown are for representation purposes only. Actual product appearance may vary due to application process, environmental settings, lighting, photography, and display settings.

2. Application of Texture:

- **Base Coat –Quartz Base Fine**
  Apply one coat of Quartz Base Fine tinted to match the colour of the top coat, with a brush.
  Dilute with 10–15% potable water if required for workability.
  Allow to dry for 6–8 hours before proceeding.
- **First Coat – Modera Lime**
  Add 20-35% portable water to modera lime top coat powder to achieve a smooth, trowelable paste.
  Apply the first coat evenly with a stainless steel trowel.
  Allow to dry for 10–12 hours.
- **Second Coat – Modera Lime Exterior**
  For the Plain effect, apply the second coat evenly with a stainless steel trowel.
  For the rough effect, when the second coat is semi-wet, use a Fillipos tool and dab it onto the surface to create texture.
  Once textured, smoothen lightly with the trowel to achieve the desired finish.
  Allow to dry for 24–36 hours depending on weather conditions.
- **Protective Finish – PU Coating**
  Ensure the surface is fully dry.
  Apply two coats of Aarka PU (water-based polyurethane), diluted 1:1 with water, using a brush and roller.
  Allow 8–10 hours drying between coats for optimal protection.

The physical texture sample represents the intended color and finish; however, slight variations may occur in the final product due to inherent material properties and production processes. As texture coatings are applied manually, subtle differences in appearance are natural and contribute to the uniqueness of each surface. For optimal results, we recommend testing the texture on a small section before proceeding with full-scale application.



AARKA® PAINTS

Quality Manufacturers of Water-Based Interior and Exterior Surface Coatings.

Heuristic Formulations

101, Cosmos Industrial Estate, Naik Pada, next to BASCO, Waliv, Vasai East, District Palghar, Pin code 401208, Maharashtra, India.

Write to us at:

aarkapaints@gmail.com
heuristicformulations@gmail.com

Find us on :

aarkapaints_

www.aarkapaints.com

All textures and shades displayed may vary from the real colours seen on the wall or floor. The actual colours are influenced by the finishing technique, texture, material gloss, Lighting conditions and the presence of other colours in the surroundings.
All products names, logos, and brands are property of their respective owners. Any Disputes are subject to Mumbai Jurisdiction.

Scan the QR code to visit our website.